



XPS TILE BACKER BOARD APPLICATIONS

XPS tile backer boards are so much more than a component for building and offer endless installation capabilities. Available in a wide variety of thicknesses and sizes, they are compatible with virtually any substructure. XPS tile backer boards are lightweight, waterproof, and dimensionally stable, making them fast and simple to work with.

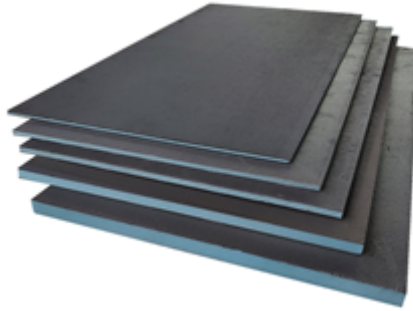


Structure

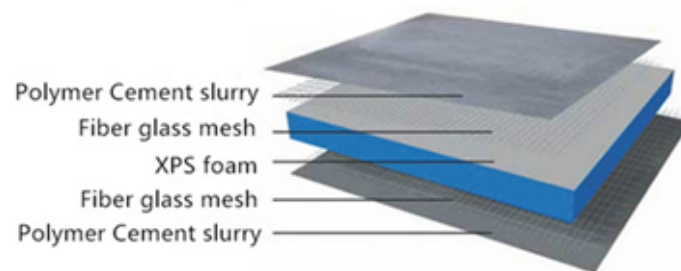

Advantages

- 100% waterproof and serve as thermal insulation board.
- Protects against mold and mildew.
- Strong and stable. High-rigidity and durability.
- Lightweight but easy to cut.
- Available in multiple thicknesses and sizes.


Installation Instruction

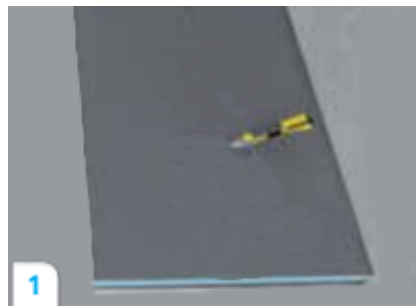

Step1

Using only a utility knife, tile backer boards are effortlessly cut and shaped.

Interdistribution

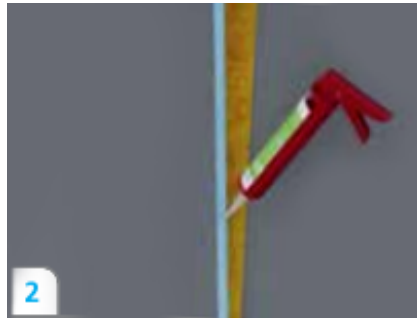

Step2

A continuous 1/2" (1.25cm) bead of sealant is applied on the foam edges of tile backer board before another tile backer board is joined by butting tightly.



Step3

Apply 1 fastener per every 12" (30cm), with an extra fastener applied directly in the seam. On a ceiling, apply 1 fastener per every 6"(15cm).



Step4

Apply thinset mortar spread flat over all seams and screw holes using a trowel.



Step5

Embed the waterproof band on thinset mortar to seal seams and every screw holes. Spread flat all excess mortar.